


High-response valve with integrated digital axis controller (IAC-R) and clock-synchronized PROFIBUS DP/V2 (PROFIdrive profile)

RE 29291/06.13
Replaces: 02.11

1/18

Type 4WRPNH.../24F..

Size 6 and 10
Component series 2X
Maximum operating pressure 315 bar
Maximum flow 100 l/min ($\Delta p = 70$ bar)

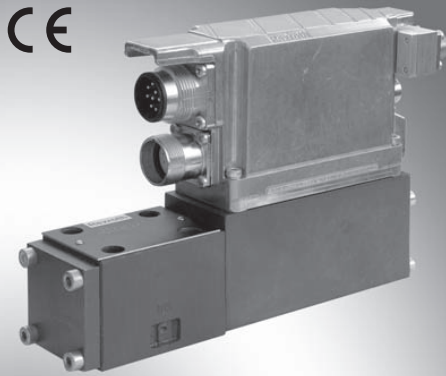

TB0193

Type 4WRPNH 6 .../24F..

Table of contents

Content	Page
Feature	1
Ordering code	2
System overview	3
Symbols	4
Function, section	5
Technical data	6 and 7
Block diagram of the controller functionality	7
Electrical connections, assignment	8 and 9
Characteristic curves	10 to 13
Unit dimensions	14 and 15
Accessories	16 and 17
Project planning / maintenance instructions / additional information	18

Features


- Direct operated high-response valves size 6 and size 10 with servo performance type control spool and sleeve
- Single-side operated, 4/4 fail-safe position in deactivated state
- Integrated digital axis control functionality (IAC-R) for:
 - position control with underlying velocity control
 - DSC functionality
- Analog sensor interfaces for
 - current and voltage
- Digital sensor interfaces for
 - 1 x length measurement system 1Vpp or
 - 1 x length measurement system SSI or
 - 1 x length measurement system EnDat 2.2
- Clock-synchronous command value provision according to PROFIdrive profile V4.0
 - telegram 5 or 105
- PROFIBUS DP/V1, DP/V2
- Quick commissioning via PC and commissioning software WinHPT from version 2.1

Ordering code

4WRP	N	H		B		-2X	/M	/24	F		*
-------------	----------	----------	--	----------	--	------------	-----------	------------	----------	--	----------

With integrated digital axis controller for NC control systems = **N**
 Control spool / sleeve = **H**
 Size 6 = **6**
 Size 10 = **10**


Spool symbols
 4/4 directional design

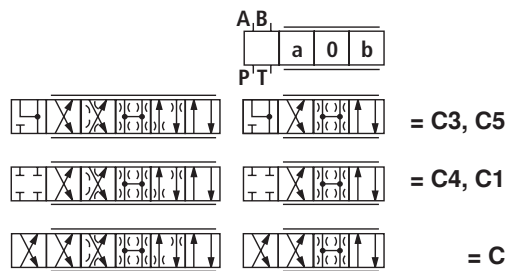

With symbols C5 and C1:

P → A: q_v B → T: $q_v / 2$
 P → B: $q_v / 2$ A → T: q_v

Mounting side of the inductive position transducer



Rated flow at 70 bar valve pressure differential
 (35 bar / control edge)

Size 6	
2 l/min ¹⁾	= 02
4 l/min	= 04
12 l/min ⁵⁾	= 12
15 l/min ²⁾	= 15
24 l/min ⁵⁾	= 24
25 l/min ²⁾	= 25
40 l/min ³⁾	= 40
Size 10	
50 l/min	= 50
100 l/min	= 100

Flow characteristics

Linear = **L**
 Inflected characteristic curve ⁴⁾ = **P**

Further details in clear text

Sensor interfaces

- A** = X4, M12-5, ±10 V
X7, M12-5, ±10 V
- B** = X4, M12-5, ±10 V
X7, M23-12, SSI
- C** = X4, M12-5, ±10 V
X7, M23-12, 1 Vpp
- G** = X4, M12-5, 4-20 mA
X7, M12-5, 4-20 mA
- T** = X4, M12-5, ±10V
X7, M12-8, EnDat 2.2

Electronics interface

- A6** = ±10 VDC
- F6** = 4 to 20 mA

Drive bus

- F** = PROFIBUS DP/V2
PROFIdrive profile
- 24** = Supply voltage 24 V

Seal material


- NBR gaskets suitable for mineral oils (HL; HLP) according to DIN 51524

M =

- 2X** = Component series 20 to 29
(20 to 29: unchanged mounting and connection dimensions)

¹⁾ Rated flow 2 l/min not with flow characteristics "P"
²⁾ Only in connection with flow characteristics "P"
³⁾ q_v 2:1 only with rated flow = 40 l/min
⁴⁾ Inflection 60% at size 6 with rated flow "15" and "25", otherwise inflection 40%
⁵⁾ Only in connection with flow characteristics "L"

System overview

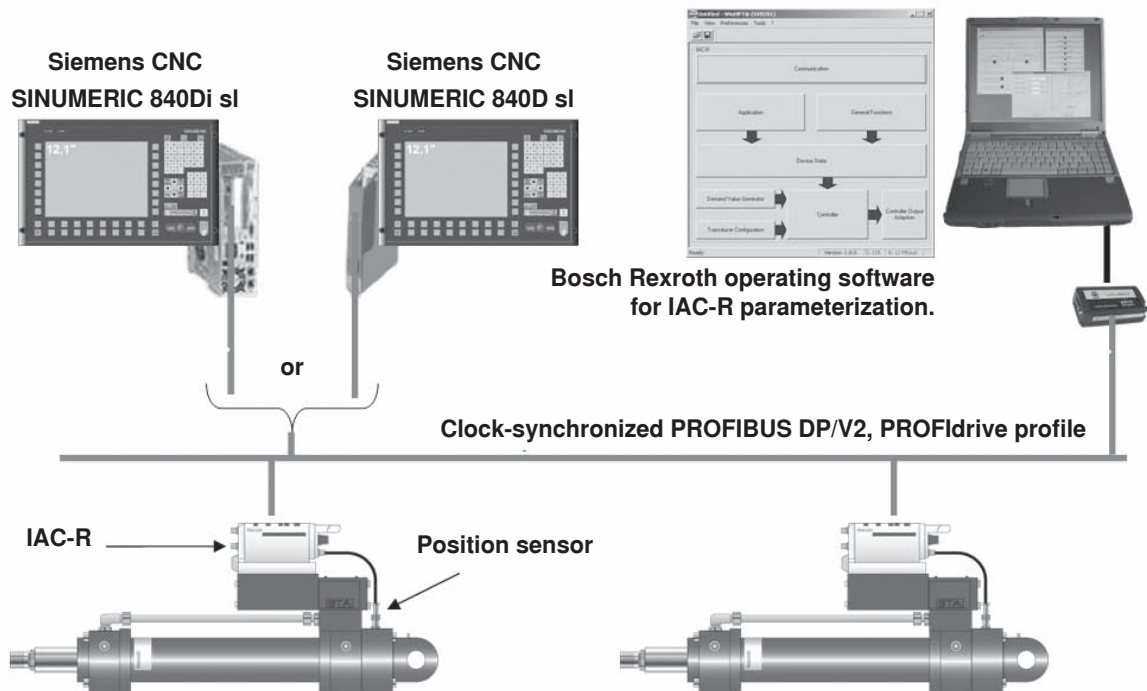

Symbols

Size 6

	<p>Linear</p>	<p>p: Inflection 60 % [q_n 15.25 l/min]</p>	<p>p: Inflection 40 % [q_n 40 l/min]</p>
	<p>C3, C5, C4, C1</p> <p>C</p>	<p>C3, C5, C4, C1</p>	<p>C3, C5, C4, C1</p>
<p>Standard = 1:1, from $q_n = 40$ l/min also 2:1</p>			

Size 10

	<p>Linear</p>	<p>p: Inflection 40 %</p>
	<p>C3, C5, C4, C1</p> <p>C</p>	<p>C3, C5, C4, C1</p>

Function, section

Construction

The IAC-R valve mainly consists of:

- Direct operated high-response valve (1) with servo performance type control spool
- Integrated digital axis controller (2) with analog (X4/X7) or digital (X7) sensor interface
- PROFIBUS interface (X3) with functionality according to DP/V1 with clock synchronization according to DP/V2

Functional description

The IAC-R valve is a digital high-response valve with integrated axis controller with the following functionalities:


- Position control
- DSC functionality
- Analog (X4/X7) or digital (X7) sensor interface
- Clock-synchronous command value specification according to PROFIdrive profile V4.0
 - telegram 5 or 105
- The controller parameters are set via the PROFIdrive parameter protocol.
- Separate supply voltage for bus/controller and power part (output stage) for safety reasons.

PC program WinHPT

To implement the project planning task and to parameterize the IAC-R valves, the user may use the commissioning software WinHPT (see accessories).

- Parameterization
- Diagnosis
- Comfortable data management on a PC
- PC operating systems: Windows 2000 or Windows XP

High-response valve with integrated axis controller and analog (X4/X7) or digital (X7) sensor interface

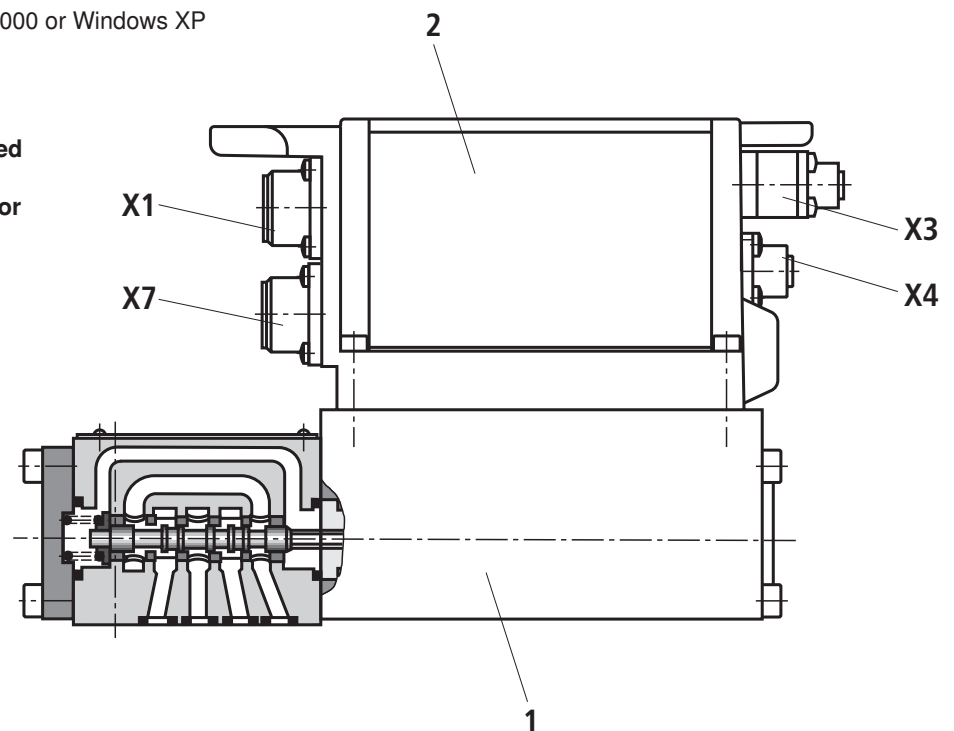

The digital integrated control electronics enables the following fault detection:

- Cable rupture of sensorics system
- Undervoltage
- Temperature of the integrated electronics
- Communication fault
- Watchdog
- Synchronous monitoring

The following additional functions are available:

- Fault output 24 V or control of an isolator valve
- Control output adjustment
 - deadband compensation
 - zero offset
 - valve inflection compensation
 - friction compensation
 - direction-dependent gain
- PIDT1 controller
- State controller
- Automatic/semi-automatic drive measurement for simple controller optimization

Technical data (For applications outside these parameters, please consult us!)

General		Size 6	Size 10				
Type		Spool valve, directly operated, with steel sleeve					
Actuation		Proportional solenoid with position control, OBE					
Type of connection		Subplate mounting, porting pattern according to ISO 4401					
Installation position		any					
Ambient temperature range	°C	-20 ... +50					
Weight	kg	2.7	7.5				
hydraulic (measured with HLP46, $\vartheta_{oil} = 40^\circ\text{C} \pm 5^\circ\text{C}$)							
Hydraulic fluid		Hydraulic oil according to DIN 51524...535, other media upon request					
Viscosity range	recommended	mm ² /s	20 ... 100				
	max admissible	mm ² /s	10 ... 800				
Hydraulic fluid temperature range	°C	-20 ... +60					
Maximum admissible degree of contamination of the hydraulic fluid – cleanliness class according to ISO 4406 (c)		Class 18/16/13 ¹⁾					
Flow direction		according to symbol					
Hydraulic, size 6							
Rated flow at $\Delta p = 35$ bar per edge ²⁾	l/min	2	4	12	15	24/25	40
Max operating pressure	Ports P, A, B	bar					
	Port T	bar					
Limitations of use Δp pressure drop across valve $q_{Vnom} > q_{N valves}$	Spool symbols C, C3, C5	bar	315	315	315	315	160
	Spool symbols C1, C4	bar	315	315	315	280	100
Leakage oil at 100 bar	linear characteristic curve L	cm ³ /min	< 150	< 180	< 300	–	< 500
	inflected characteristic curve P	cm ³ /min	–	–	–	< 180	< 300
Hydraulic, size 10							
Rated flow at $\Delta p = 35$ bar per edge ²⁾	l/min	50 (1:1)	50 (2:1)	100 (1:1)	100 (2:1)		
Max. operating pressure	Ports P, A, B	bar					
	Port T	bar					
Limitations of use Δp pressure loss at valve $q_{Vnom} > q_{N valves}$	Spool symbols C, C3, C5	bar	315	315	160	160	
	Spool symbols C1, C4	bar	250	250	100	100	
Leakage oil at 100 bar	linear characteristic curve L	cm ³ /min	< 1200	< 1200	< 1500	< 1500	
	inflected characteristic curve P	cm ³ /min	< 600	< 500	< 600	< 600	
Static / dynamic		Size 6	Size 10				
Hysteresis	%	≤ 0.2					
Manufacturing tolerance	%	< 10					
Actuating time for signal step 0 ... 100 %	ms	≤ 10			25		
Temperature drift		Zero point drift < 1% at $\Delta\vartheta = 40^\circ\text{C}$					
Zero point calibration		ex factory ±1 %					
Conformity		CE according to EMC directive 2004/108/EC					

The footnotes are explained on the following page.

Technical data (For applications outside these parameters, please consult us!)

Electrical			
Relative duty cycle		%	100 (continuous operation)
Protection class			IP 65 according to EN 60529 with mounted and locked line connectors
Supply voltage	Nominal voltage	VDC	24
	Lower limit value	VDC	21
	Upper limit value	VDC	36
	Max. admissible residual ripple	Vpp	2 (at supply voltage of 23 V ... 34 V)
Power consumption	Size 6	W	max. 40
	Size 10	W	max. 60
Protective earthing conductor and shielding			see pin assignment (CE-compliant installation)
Adjustment			Calibrated ex factory, see valve characteristic curve


1) The cleanliness classes stated for the components need to be maintained in hydraulic systems.

Effective filtration prevents faults and at the same time increases the service life of the components.

For selecting the filters, see www.boschrexroth.de/filter

2) Flow at different Δp :

$$q_x = q_{\text{nom}} \cdot \sqrt{\frac{\Delta p_x}{35}}$$

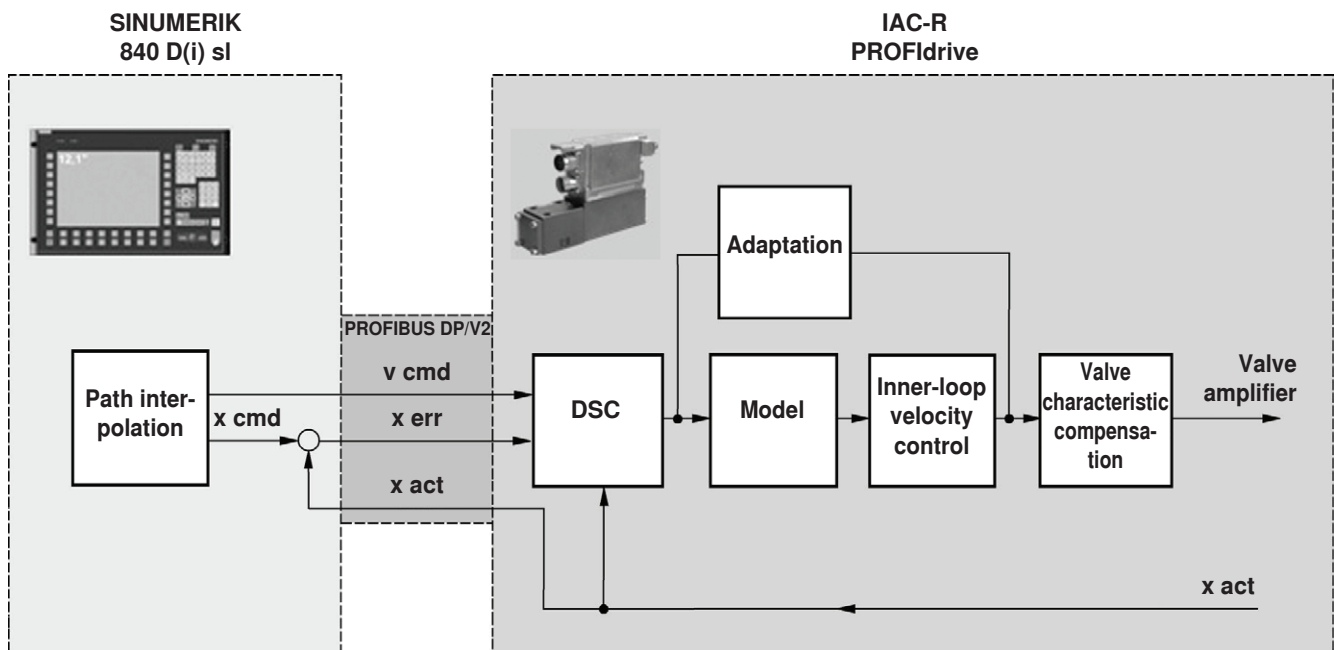Block diagram of the controller functionality


Electrical connections, assignment

Unit connector assignment X1, 11-pin + PE according to DIN EN 175201-804


Pin	No. or Litz wire color ¹⁾	Assignment interface A6/F6
1	1	24 VDC (supply for output stage and power switching signal)
2	2	0 V \triangle load zero (for output stage)
3	white	reserved
4	yellow	reserved
5	green	reserved
6	purple	reserved
7	pink	reserved
8	red	reserved
9	brown	24 VDC (supply for signal part and bus)
10	black	0 V reference potential for pin 9 (supply for signal part and bus)
11	blue	Switching output 24 V (error signal or power switching signal) max 1.8 A
PE	green-yellow	Protective earthing conductor (connected directly to metal housing)

Connect shield on PE only on the supply side!

¹⁾ Litz wire colors of the connection lines for line socket (see accessories)

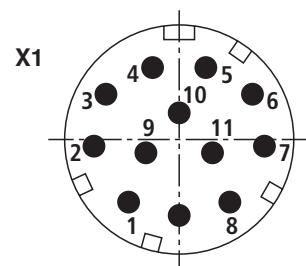

Unit connector assignment for PROFIBUS DP "X3" (code B), M12, 5-pin, socket / pins

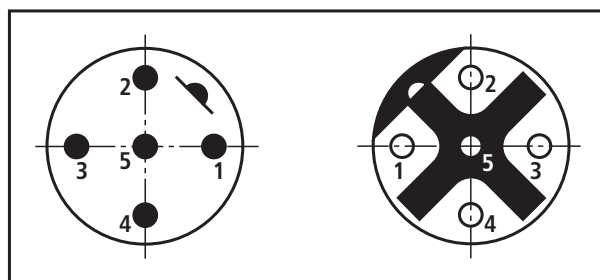

Pin	Pinout of plug	Pinout of socket
1	n.c.	VP
2	RxD/TxD-N (A line)	RxD/TxD-N (A line)
3	DGND	DGND
4	RxD/TxD-P (B line)	RxD/TxD-P (B line)
5 ¹⁾	Shield	Shield

¹⁾ We recommend connecting the shield on both sides via the metallic housing of the plug-and-socket-connectors. Using pin 5 will have adverse effects on the effectiveness of the shield!


The unit socket and the unit plug are equivalent as PROFIBUS connections.

The electrically isolated voltage +5 V (pin 1 - VP) at the socket allows for passive termination of the PROFIBUS.

Electrical connections, assignment

Analog sensor interfaces, connection "X4" and "X7" (code A), M12, 5-pin, socket

Pin	Pinout Voltage interface	Pinout Current interface
1	Supply 24 VDC	Supply 24 VDC
2	Signal 3 (X4) / 4 (X7), (-10 ... +10 V)	Signal 3 (X4) / 4 (X7), (4 ... 20 mA)
3	Zero 0 V	Zero 0V
4	Signal 1 (X4) / 2 (X7), (-10 ... +10 V)	Signal 1 (X4) / 2 (X7), (4 ... 20 mA)
5	Shield	Shield

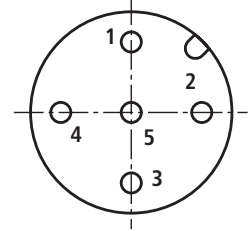


Note:

The analog sensor interfaces at the connections X4 and X7 are not coded. Danger of confusing the same! The user has to ensure proper wiring!

Digital sensor interface 1Vpp or SSI measurement system "X7", M23, 12-pin, socket

Pin	Pinout 1Vpp	Pinout SSI
1	\bar{B}	0 V
2	sense +5 V ¹⁾	Data
3	R	Clock
4	\bar{R}	n.c.
5	A	n.c.
6	\bar{A}	n.c.
7	n.c.	n.c.
8	B	n.c.
9	n.c.	24 V
10	0 V ¹⁾	$\overline{\text{Data}}$
11	Sense 0 V ¹⁾	$\overline{\text{Clock}}$
12	+5 V ¹⁾	n.c.

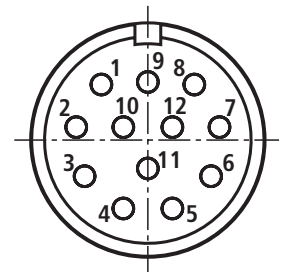


Note:

The sense signal is not evaluated.

Digitale Sensorschnittstelle EnDat 2.2 Messsystem „X7“, M12, 8-polig, Buchse

Pin	Belegung EnDat 2.2
1	0 V ²⁾
2	+5 V ²⁾
3	Data
4	$\overline{\text{Data}}$
5	0V ²⁾
6	$\overline{\text{Clock}}$
7	Clock
8	supply +5 V ²⁾



Note:


We recommend connecting the shields on both sides via the metallic housings of the plug-and-socket-connectors. Using connector pins will affect the effectiveness of the screen! Internal shields are not required.

¹⁾ **Recommendation:** Connect the voltages +5 V (pin 12) and +5 V-Sense (pin 2), as well as 0 V (pin 10) and 0 V-Sense (pin 11) for transducer supply.


²⁾ **Recommendation:** Connect the voltages +5 V (pin 2 and 8) as well as 0 V (pin 1 and 5) for transducer supply.

Characteristic curves size 6 (measured with HLP46, $\vartheta_{oil} = 40 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$)

Pressure gain

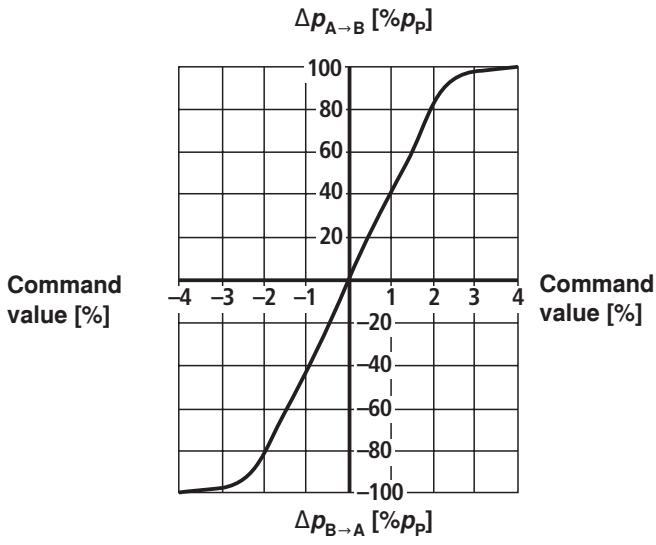

Bode diagram


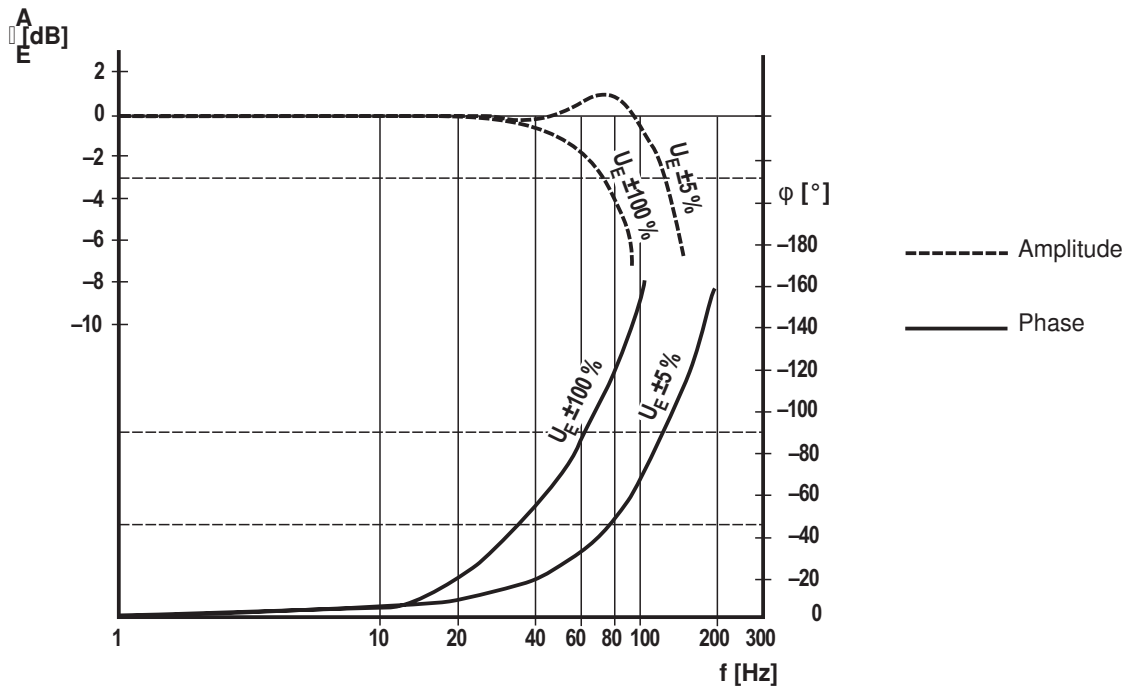


Characteristic curves size 6 (measured with HLP46, $\dot{v}_{oil} = 40 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$)

Flow - signal function



L: Linear

P: Inflection 60 %

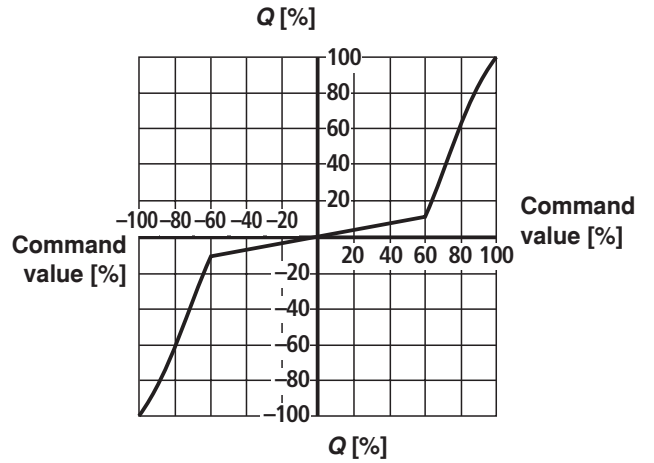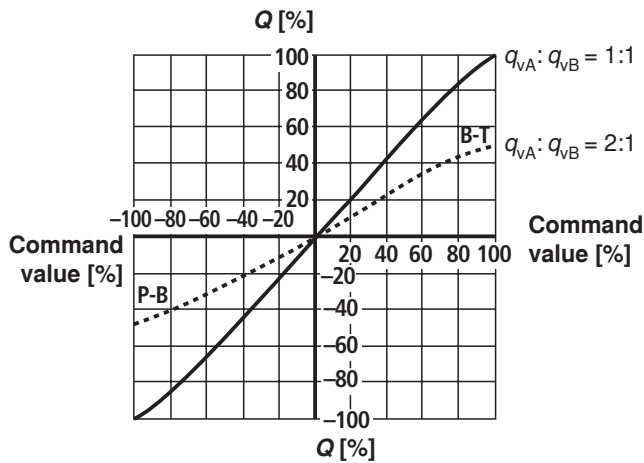

P: Inflection 60 %

P: Inflection 40 %

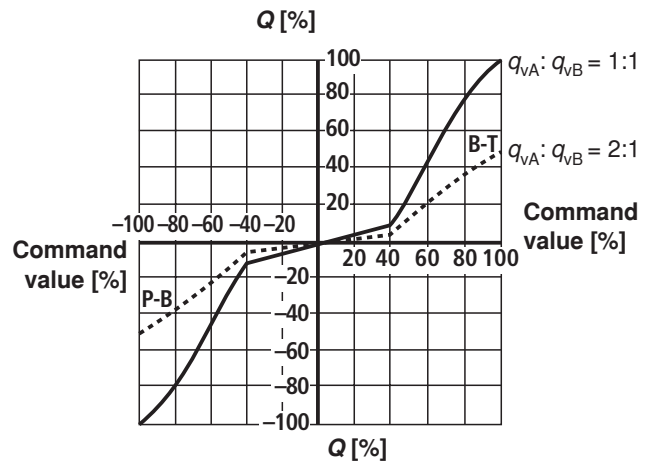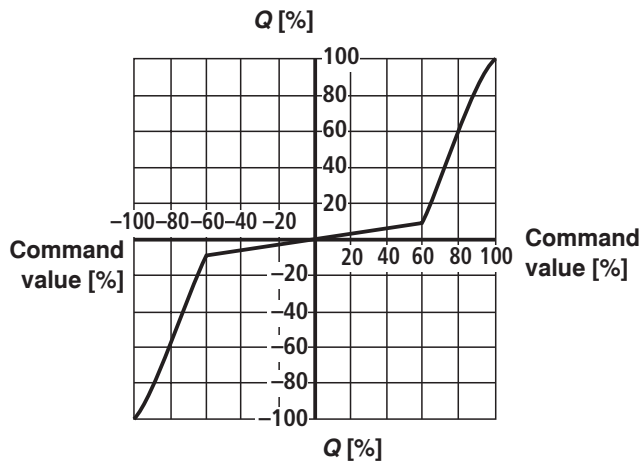


Note:

Ex factory the inflection-compensation is activated at the valve electronics. In order that the P-characteristic curve appears linear.


		Fail-safe position			
	Leakage oil at	100 bar	P → A	50 cm ³ /min	
			P → B	70 cm ³ /min	
	Flow at	$\Delta p = 35 \text{ bar}$	A → T	10 ... 20 l/min	
			B → T	7 ... 20 l/min	
	Leakage oil at	100 bar	P → A	50 cm ³ /min	
			P → B	70 cm ³ /min	
			A → T	70 cm ³ /min	
			B → T	50 cm ³ /min	
	Fail-safe	$p = 0 \text{ bar} \Rightarrow 7 \text{ ms}$	Shut-down U_B (output stage) X1 / pin 1+2		
		$p = 100 \text{ bar} \Rightarrow 10 \text{ ms}$			

Characteristic curves size 10 (measured with HLP46, $\vartheta_{oil} = 40 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$)

Pressure gain

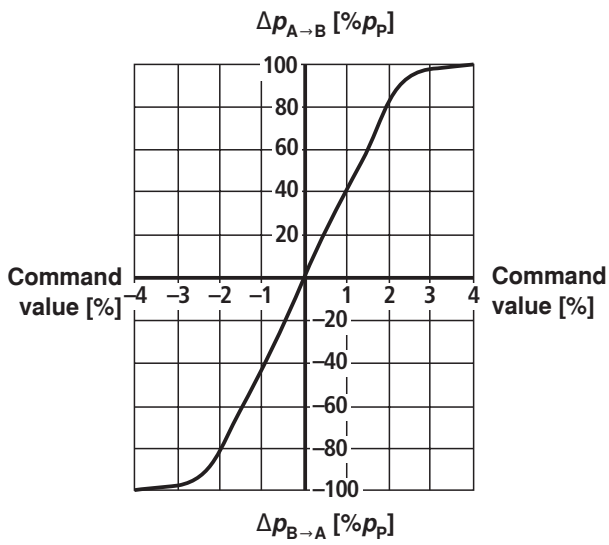


Bode diagram

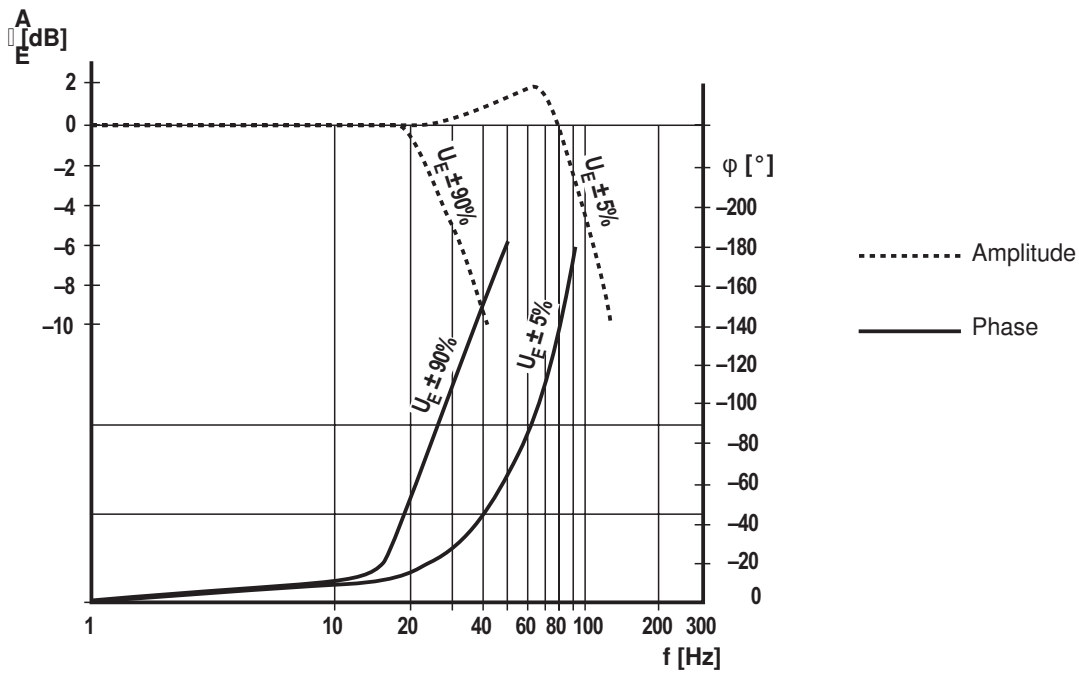


Characteristic curves size 10 (measured with HLP46, $\vartheta_{oil} = 40 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$)

Flow - signal function


L: Linear 1:1

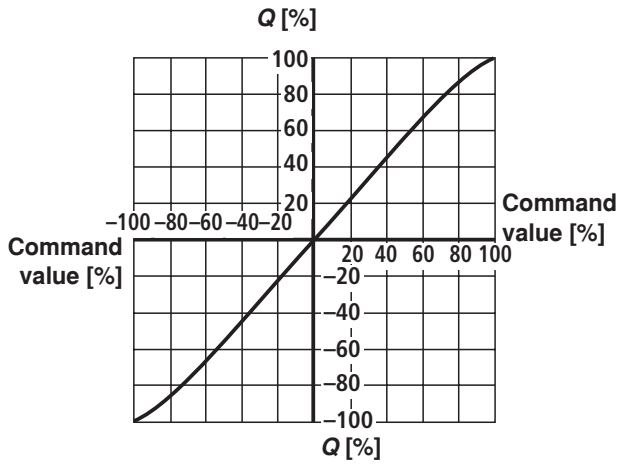


L: Linear 2:1

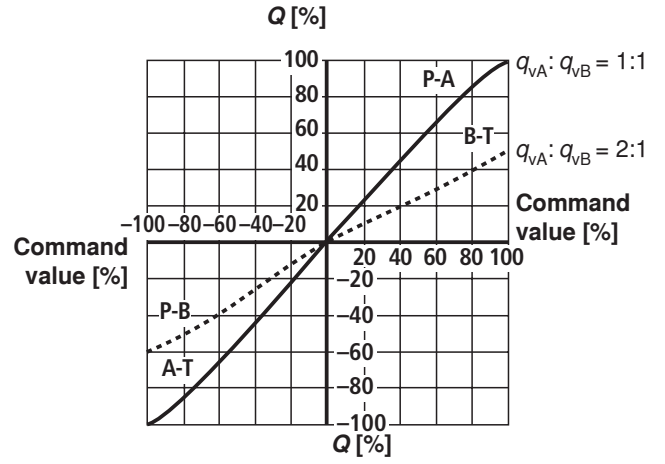

P: Inflection 40% 1:1

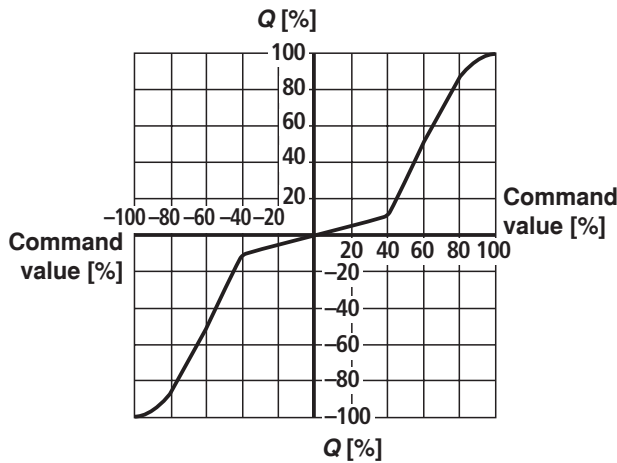

P: Inflection 40% 2:1

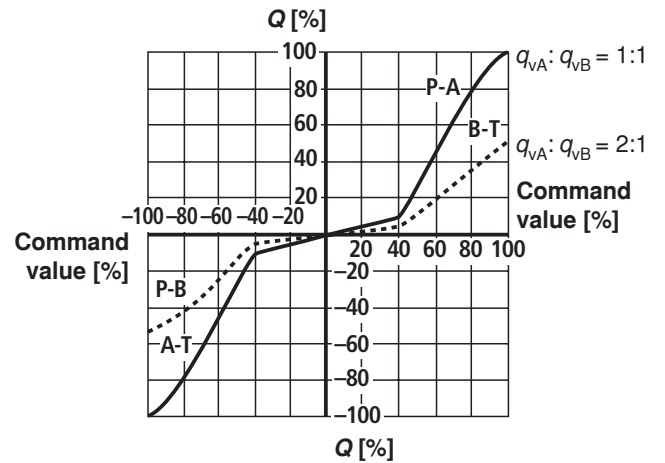


Note:

Ex factory the inflection-compensation is activated at the valve electronics. In order that the P-characteristic curve appears linear.

		Fail-safe position			
	Leakage oil at	100 bar	P → A	50 cm ³ /min	
			P → B	70 cm ³ /min	
	Flow at	$\Delta p = 35 \text{ bar}$	A → T	10 ... 20 l/min	
		$q_n = 50/100 \text{ l/min}$	B → T	7 ... 20 l/min	
	Leakage oil at	100 bar	P → A	50 cm ³ /min	
			P → B	70 cm ³ /min	
			A → T	70 cm ³ /min	
			B → T	50 cm ³ /min	
	Fail-safe	$p = 0 \text{ bar} \Rightarrow 12 \text{ ms}$	Shut-down U_B (output stage) X1 / pin 1+2		
		$p = 100 \text{ bar} \Rightarrow 16 \text{ ms}$			

Unit dimensions size 6 (dimensions in mm)

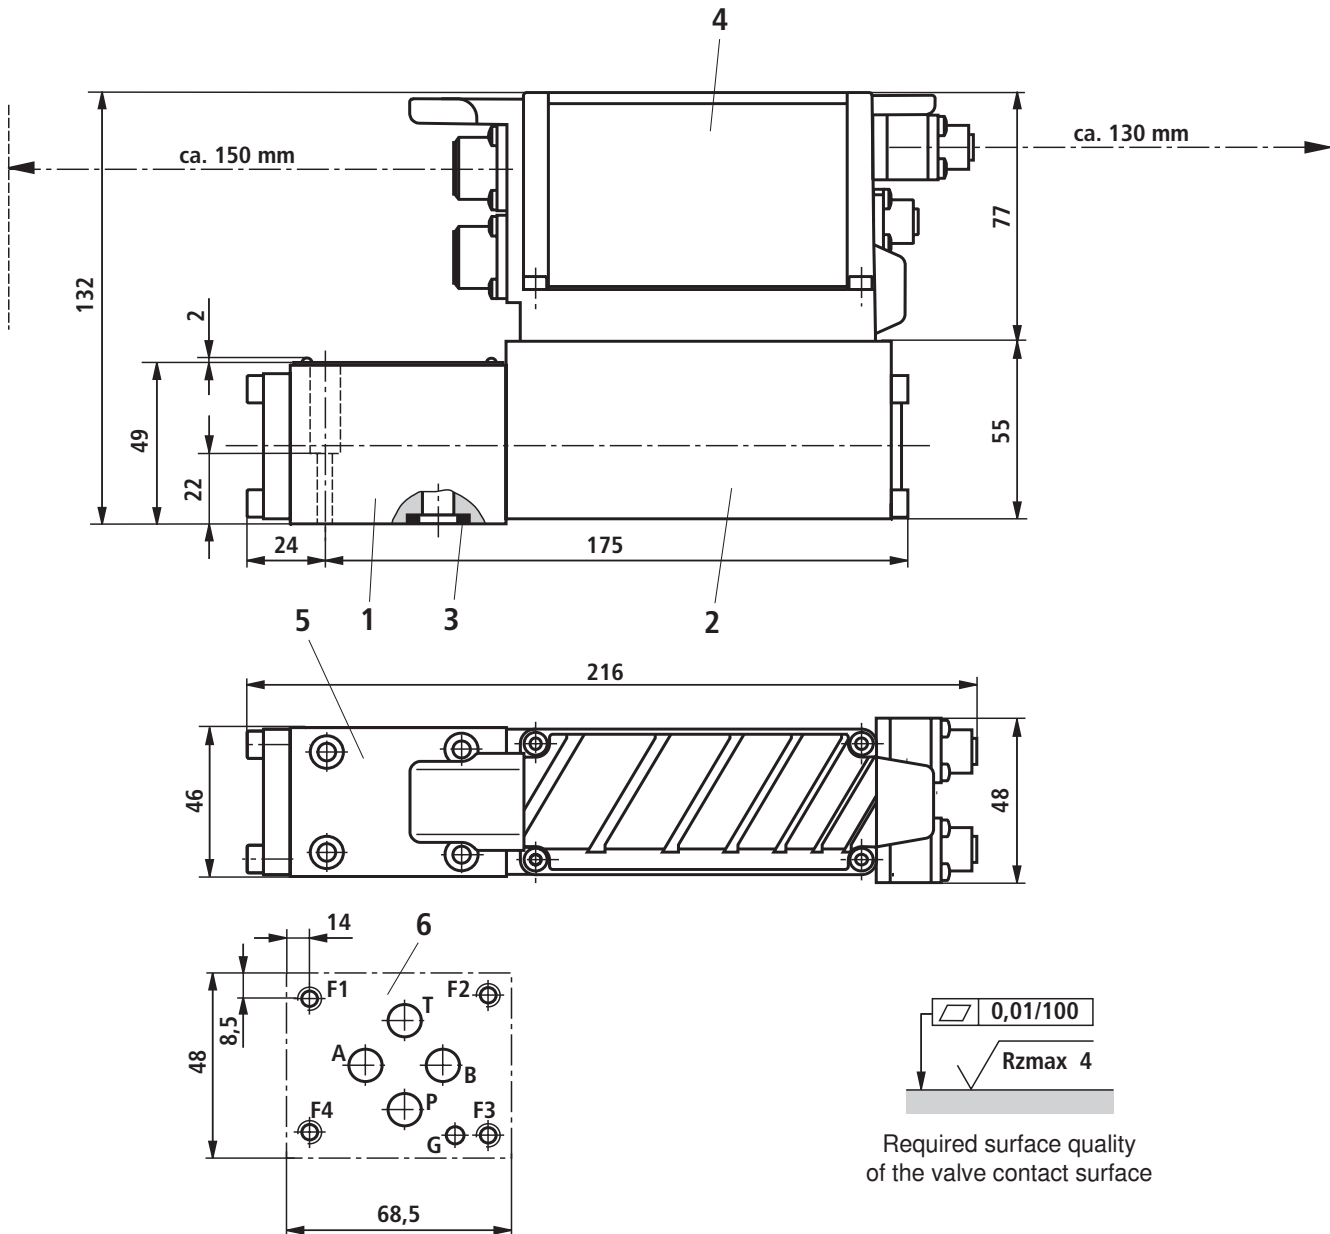

- Valve housing
- Control solenoid with position transducer
- Identical seal rings for ports P, A, B, T
- Integrated digital control electronics
- Nameplate
- Machined valve contact surface, position of the ports according to ISO 4401-03-02-0-05

Valve mounting screws

(not included in scope of delivery):


4 units of hexagon socket head cap screws according to ISO4762-M5x30-10.9-N67F 821 70

(galvanized according to Bosch standard N67F 821 70)

$M_T = 6 \pm 2\text{ Nm}$

material no. **2910151166**

Unit dimensions size 10 (dimensions in mm)

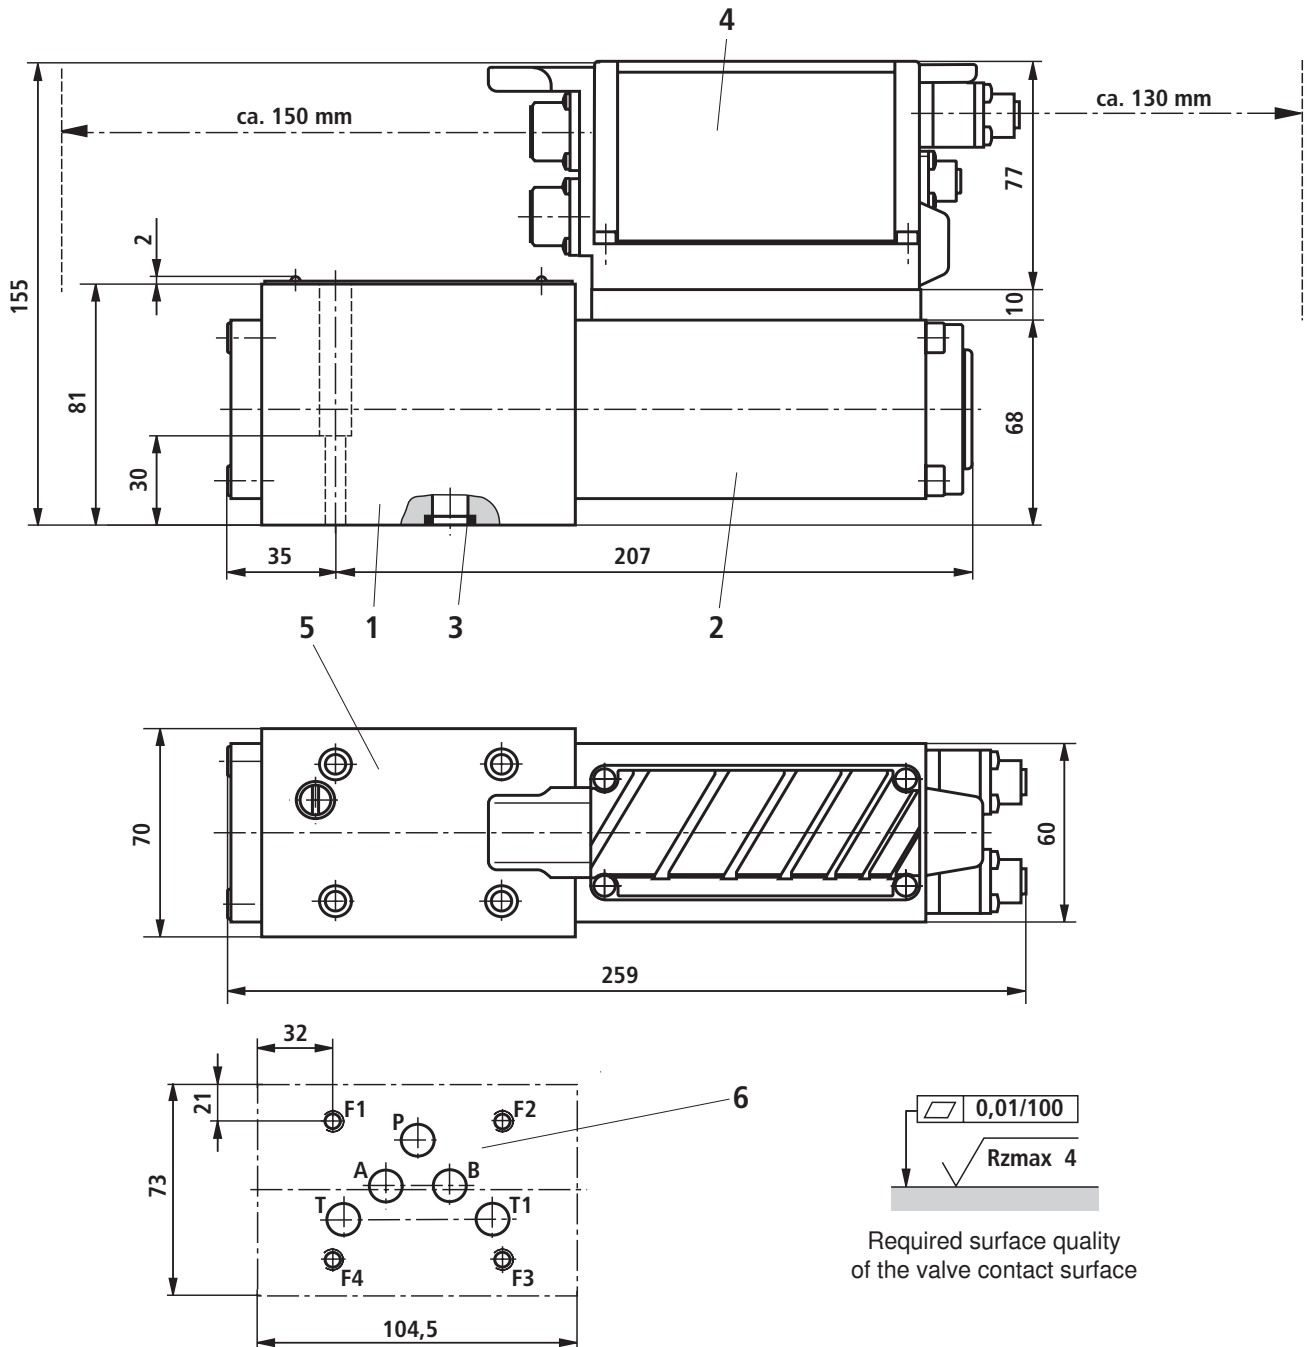

- Valve housing
- Control solenoid with position transducer
- Identical seal rings for ports P, A, B, T, T1
- Integrated digital control electronics
- Nameplate
- Machined valve contact surface, position of the ports according to ISO 4401-05-04-0-05
 Deviating from the standard:
 – port T1 exists additionally

Valve mounting screws

(not included in scope of delivery):

4 units of hexagon socket head cap screws according to ISO4762-M6x40-10.9-N67F 821 70


(galvanized according to Bosch standard N67F 821 70)

$M_T = 11 \pm 3 \text{ Nm}$

material no. **2910151209**

Accessories for parameterization (not included in scope of delivery)

For parameterization using the PC, the following is required:	PROFIBUS DP (code B)
1 Interface converter (USB-PROFIBUS DP)	VT-ZKO-USB/P-1-1X/V0/0 Mat.no. R901071962
2 Start-up software	WinHPT (from version 2.1) Download at www.boschrexroth.com/IAC
3 Connecting cable, 3 m	D-Sub/M12, Mat.no. R901078053
4 24 V supply voltage	Mating connector for X1 (see below)

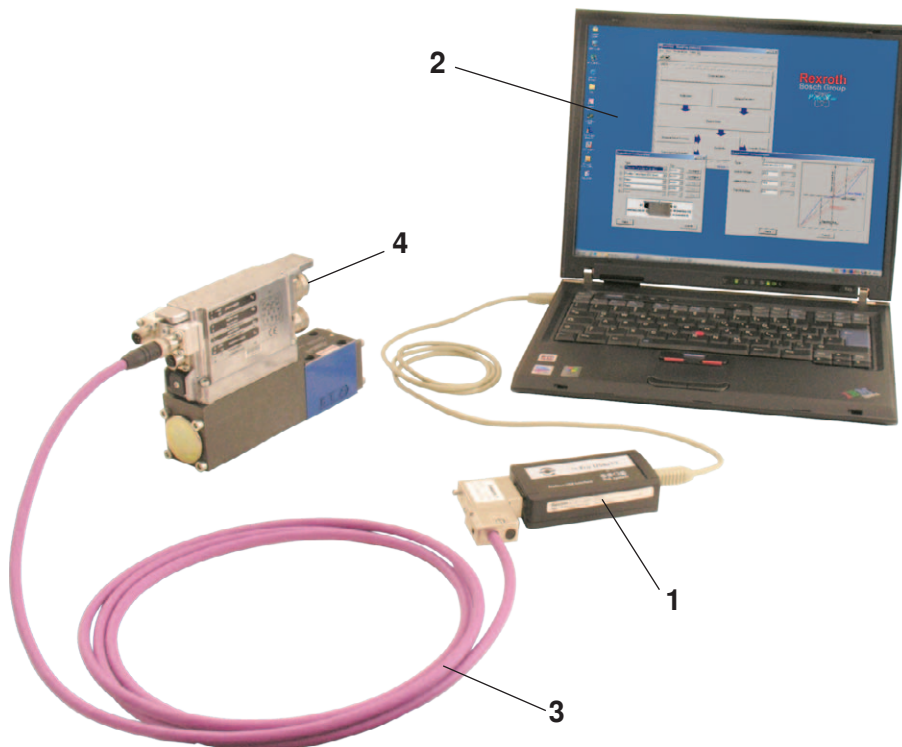


Accessories, port X1 (not included in the scope of delivery)





Mating connector for X1

Mating connector according to EN 175201-804 (12-pole, metal design)







- Mating connector (construction set) for a cable diameter of 12-15 mm, Material no. **R901268000**
- Mating connector with 5 m cable, 12 x 0.75 mm² with cable shield, assembled, Material no. **R901272854**
- Mating connector with 20 m cable, 12 x 0.75 mm² with cable shield, assembled, Material no. **R901272852**

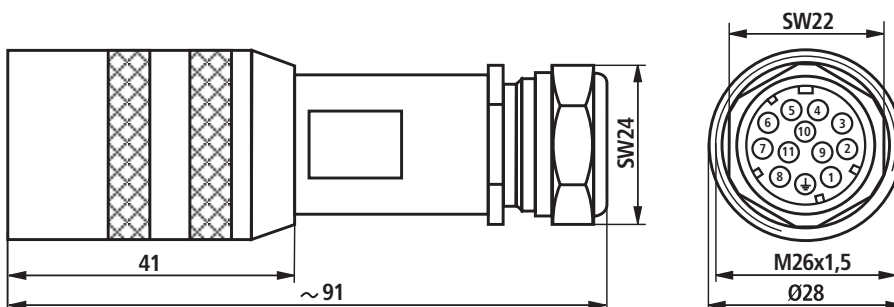

Accessories, sensor connections (not included in scope of delivery)

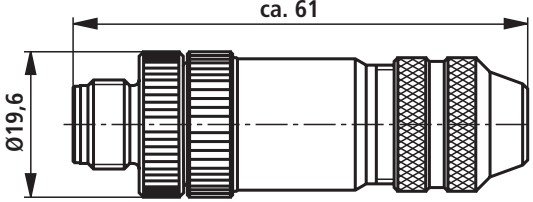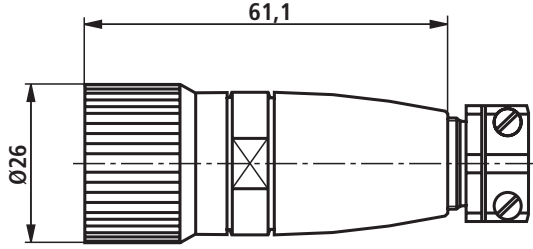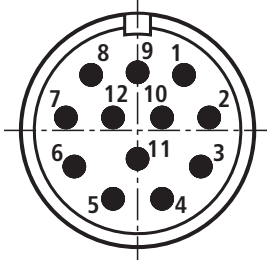
Description	View, dimensions	Pin pattern, order details
<p>X4, X7 (analog sensors) Plug-in connector, 5-pole, M12 x 1, pins, A coding, metal design</p>		 <p>Mat. no.: R901075542 (cable diameter 4 ... 6 mm)</p>
<p>X7 (digital sensors, 1 Vpp and SSI) Plug-in connector, 12-pole, M23, pins, soldered joint, metal design with cap nut</p>		 <p>Mat. no.: R901076284 (cable diameter up to 10.5 mm)</p>

Accessories, PROFIBUS (B code) (not included in scope of delivery)

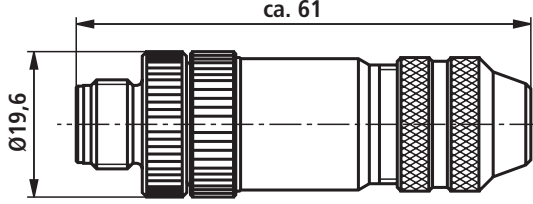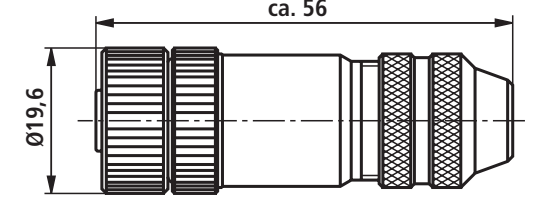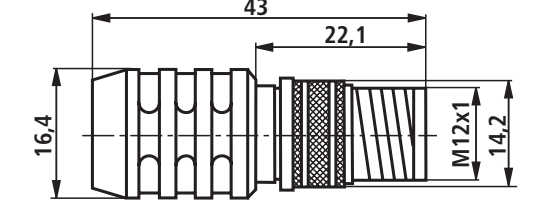Description	Detail, dimensions	Pin pattern, order details
<p>X3 Round connector, to be wired by user, 5-pin, M12 x 1 Straight line connector in metal design</p>		 <p>Material no.: R901075545 (cable diameter 6 - 8 mm)</p>
<p>X3 Round connector, to be wired by user, 5-pin, M12 x 1 Straight mating connector from metal</p>		 <p>Material no.: R901075550 (cable diameter 6 - 8 mm)</p>
<p>PROFIBUS terminating resistor Round plug-in connector, 5-pin, M12 x 1</p>		 <p>Material no.: R901078086</p>

Project planning / maintenance instructions / additional information

Product documentation for IAC-R with clock-synchronized PROFIBUS DP/V2 (PROFIdrive profile)

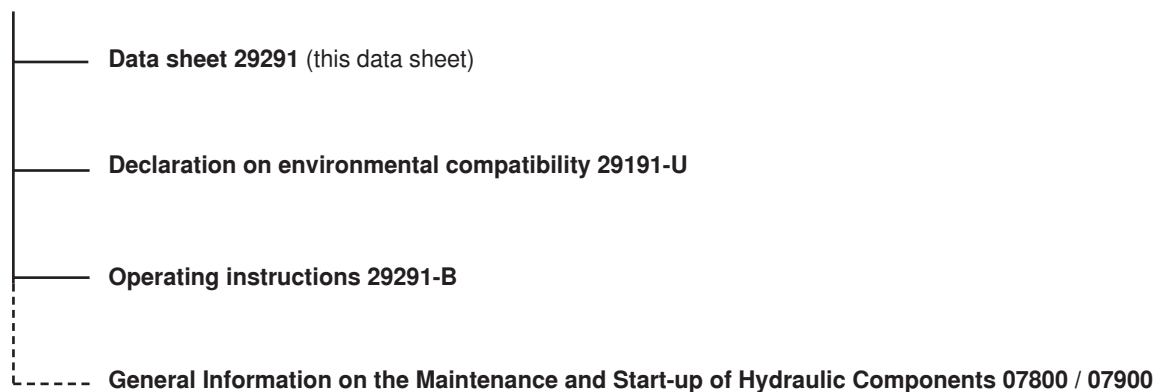

Commissioning software and documentation on the internet: www.boschrexroth.com/IAC

Maintenance notes:

- The devices have been tested in the factory and are supplied with default settings.
- Only complete units can be repaired. The repaired units will be supplied with default settings and current firmware. User-specific settings are not maintained. The operator will have to retransfer the corresponding user parameters.

Notes:

- Connect the valve to the supply voltage only when this is required for the functional processes of the machine.
- Electric signals brought out via control electronics (e.g. signal "ready for operation") may not be used for the actuation of safety-relevant machine functions! (see also the European standard "Safety requirements for fluid power systems and their components - Hydraulics", EN 982.)
- If electromagnetic interference must be expected, take appropriate measures to safeguard the function (depending on the application, e.g. shielding, filtering)!

Notes

Bosch Rexroth AG
Hydraulics
Zum Eisengießer 1
97816 Lohr am Main, Germany
Phone +49 (0) 93 52 / 18-0
documentation@boschrexroth.de
www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Notes
